


Vibration Absorber

Features

1. Japan and South Korea imported technology
2. Germany from original leak detection equipment
3. Domestic first-class processing equipment
4. Strictly inspect the raw materials
5. Technology updates and technical breakthrough
6. High and stable quality
7. Competitive price
8. Short delivery cycle
9. Satisfactory after-sales service

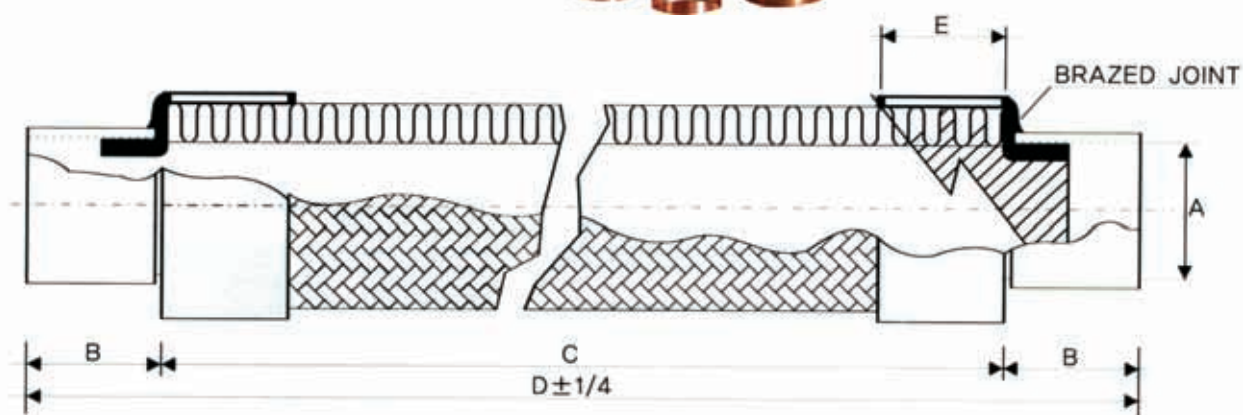

Model	Dimension					Max Working Pressure psiG	Burst Pressure psiG
	A I.D. mm	B ±3mm	C ±3mm	D ±6mm	E ±1.5mm		
LV-3/8"	9.62	20	177.5	217.5	13	500	2500
LV-1/2"	12.8	20	188.6	228.6	13	500	2500
LV-5/8"	16.2	22	206.8	250.8	17	500	2500
LV-3/4"	19.2	28	212.3	268.3	17	500	2500
LV-7/8"	22.5	30	244.8	304.8	18	500	2500
LV-1-1/8"	28.8	38	255.3	331.3	20	500	2500
LV-1-3/8"	35.3	40	315	395	22	500	2500
LV-1-5/8"	41.7	50	328.6	428.6	23	500	2500
LV-2-1/8"	54.5	60	403.8	523.8	23	390	1950
LV-2-5/8"	67	76	465.5	617.5	25	340	1700
LV-3-1/8"	79.6	85	514.2	684.2	25	300	1500
LV-3-5/8"	92.5	100	617.5	817.5	25	175	525
LV-4-1/8"	104.9	110	616.6	836.6	25	175	525